

International Journal of Scientific Research and Reviews

System and Method of Population Census Based on Vision and Remote Sensing

Singh Shashi Kr.^{1*} and Sisodia Vibhash Singh²

¹ECE Department, SBNITM, Jaipur, (Raj.) India. Email- kumar.shashi651@gmail.com

²CSE Department, SBNITM, Jaipur, (Raj.) India. Email- yssisodia2012@gmail.com

<http://doi.org/10.37794/IJSRR.2019.8418>

ABSTRACT

The research gives solution for online population census based on vision and remote sensing. The paper further relates to capturing, enhancing and monitoring data related to human population and its social, economic, environmental and ecological impact on mankind. Population estimation with questionnaires and demographic models is time consuming and usually accompanied by high costs. Real time image based approaches and operations constitute key tools towards the solution of this problem,

The developed method is based on hue threshold and Wavelet transform based imaging system. It is capable of giving the information for global city, district, zone and state .The multi resolution property gives on line , population estimation (density) and settlement, employment estimation, and other associated socioeconomic characteristic.

KEYWORDS: Population, Urbanization, Fertility, Socioeconomic, Symlet Wavelet

***Corresponding Author:**

Shashi Kr. Singh

ECE Department, SBNITM,

Jaipur, (Raj.) India.

Email- kumar.shashi651@gmail.com

INTRODUCTION

A census is the procedure of systematically acquiring and recording information about the members of a given population. The census is a single source of a variety of statistical information on different characteristics of the population of an area. Governments of many countries take continuous steps for developing systematic collection of statistics on the size of population, its growth, etc., and have special organizations for collecting census data. These organizations are responsible for generating data on population statistics including vital statistics and census. Census provides valuable information for planning and formulation of policies for Central & State Governments and is widely used by National & International agencies, scholars, business people, industrialists, and many more.

The Indian Census is the most credible source of information on Demography (Population characteristics), Economic Activity, Literacy & Education, Housing & Household Amenities, Urbanization, Fertility and Mortality, Scheduled Castes and Scheduled Tribes, Language, Religion, Migration, Disability and many other socio-cultural and demographic data.

The Census is carried out every decade in India. The Census process is manual and involves visiting each and every household and gathering particulars of the population by asking questions and filling up Census Forms. This manual population estimation process with questionnaires and demographic models is time consuming and usually accompanied by high costs. Also the time interval for monitoring and measuring is very high. Accurate estimates of small-area population are essential for supporting a wide variety of planning processes. The size and distribution of the population are often key determinants for resource allocation for state and local governments. The availability of accurate and timely population census data is essential to planning at national, regional, and local levels for both developed and developing countries. Population data, however, is only available for every decade through the national census survey. In some developing countries, such regular population census are not affordable. Timely and accurate estimation of population distribution is of considerable significance for decision makers in urban land-use planning and for comprehensive assessment of interactions between population growth and social, economic and environmental conditions. Socioeconomic information such as census data cannot be obtained on a timely basis. It is obvious that this frequency does not meet the needs for rapid growth areas where noteworthy local population change occurs between two censuses. Thus, appropriate estimation methods for demographical area are extremely necessary.

There are existing techniques in prior art for census estimation based on the intended goal and the information that is required. These techniques can be grouped into two categories: areal interpolation and statistical modelling. Areal interpolation methods are primarily designed for the zone transformation problem that involves transforming data from one set of spatial units to another. This approach uses census population data as the input and applies interpolation or disaggregation techniques to obtain a refined population surface.

The statistical modelling approach is more focused in inferring the relationship between population and other variables for the purpose of estimating the total population for an area. The statistical modelling approach does not directly use census data as the input. Rather, it makes use of socioeconomic variables and applies theories in urban geography for population estimation; census population data only participate in the model training process. The existing techniques like areal interpolation and statistical modelling are sample based and manual approaches. These techniques are not suited for online and global census measurement. For the modern scenario the need is faster methods which can be collect and process the data in short period of time so that periodic population increased can be measured and also the effects of population can be analysed.

The availability of accurate and timely population census data is essential to planning at national, regional, and local levels for both developed and developing countries. Unfortunately, the conventional population census is expensive, and is normally conducted only every ten years. In some developing countries, such regular population census is not affordable¹. The traditional approach to population estimation is mainly based on a census, which is labour-intensive, time-consuming and costly, and also encounters difficulties in updating the database². Timely and accurate estimation of population distribution is of considerable significance for decision makers in urban land-use planning and for comprehensive assessment of interactions between population growth and social, economic and environmental conditions. Socioeconomic information such as census data cannot be obtained on a timely basis. Remote sensing imagery, however, can be obtained on a daily or monthly basis and thereby has the potential for providing updated socio economic information³. However, there is a limited research outcome that has applied remote sensing information in socioeconomic research in developing countries to estimate socioeconomic indicators. The advent of GIS and satellite imagery technology in recent years has presented both opportunities and challenges to understand changes in urban environment, population estimation (density) and settlement, employment estimation, and other associated socioeconomic characteristics. These technological advances also help to produce more accurate measurements that should allow the development of better theories in both science and social science⁴. A growing number of studies

provide evidence that attempt to estimate and extract socioeconomic attributes directly from remote sensed data or indirectly by means of offline information derived from imagery. Iisaka and Hegedus proposed and apply mathematical model based on Landsat MSS data to estimate the population distribution in Tokyo, Japan. Understanding quality of life, for example, has been successfully analyzed by using data generated by remote sensing imagery and socio economic variables. Sutton⁹ model population density using night time imagery in USA. Lo⁶ estimated economic indicators in China using allometric growth model. Weber and Puissant analysed urbanization process and identify urban changes in Tunis, capital of Tunisia. Chen¹⁰ proposed an approach with different level to link remotely sensed data and areal census data in Sydney, Australia. Lo⁷ tested urban theories on spatial urban structure using remote sensing in Atlanta, USA. Daniele Marinelli¹² presented Light Detection and Ranging (LiDAR) to characterize the 3-D structure of the forest. Bin Zou et al¹¹ presented Satellite Based Mapping of Ground PM2.5 Concentration. Yang Long et al¹³ introduced Object Localization in Remote Sensing Images, Emmanuel Maggiori etal¹⁴ proposed an end-to-end framework for the dense, pixelwise classification of satellite imagery with convolution neural networks (CNNs). Fabio Pacifici et al¹⁵ presented multi angular acquisition for unique scene,

METHODOLOGY

The system consists of four phases: data capture, *data aggregation*, filtering and data storage/ data analysis.

The major com components of the developed system is Image acquisition Ip Camera, image processing software for wavelet based algorithm development, (Matlab, and Labview). The developed method and algorithm is capable satellite imaging.

The system consists of four phases: Image capture, face recognition, filtering and data storage/ data analysis.

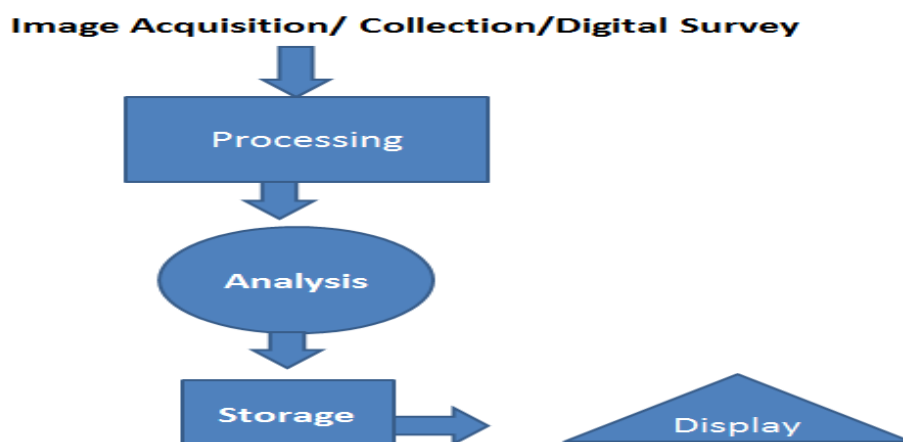


Figure1. Image processing steps

The face recognition process based on hue threshold approach is applied. Hue threshold approach is based on intensity isolation. Scattered light from the cotton tuft is collected by CCD camera lens and converted image in two-dimensional arrays. The acquired image is sent to Hue saturation plane where it is displayed in Red (R), Green (G) and Blue (B) colors. The RGB plane is 120° each with respect to white light. Three hues are made as a result of RG, GB, and BR planes. For Hue saturation value we have numbers (0-255) from which we can adjust the plane value to separate the hue plane for contaminants in the pure cotton. We have sum and division function before hue plane display. The sum function adds the intensities, which come from different surfaces of the region. The resultant component is differentiated from the intensity level of image. The hue mask is set in -180° to $+180^\circ$ whose domain and range is covering the total lux reflected from different surface of the area. This is useful for setting surface gradient between the light scattered from the person and other object. This is made to work in real time at the calculation time of approximately 10^{-4} s.

The developed method and algorithm is capable for Unmanned aerial Vehicle (Ground/ and Satellite imaging). It consists of Camera, Digital I/O, Auto pilot, Processing Stations, Recording stations, Population Density display as shown in figure3.

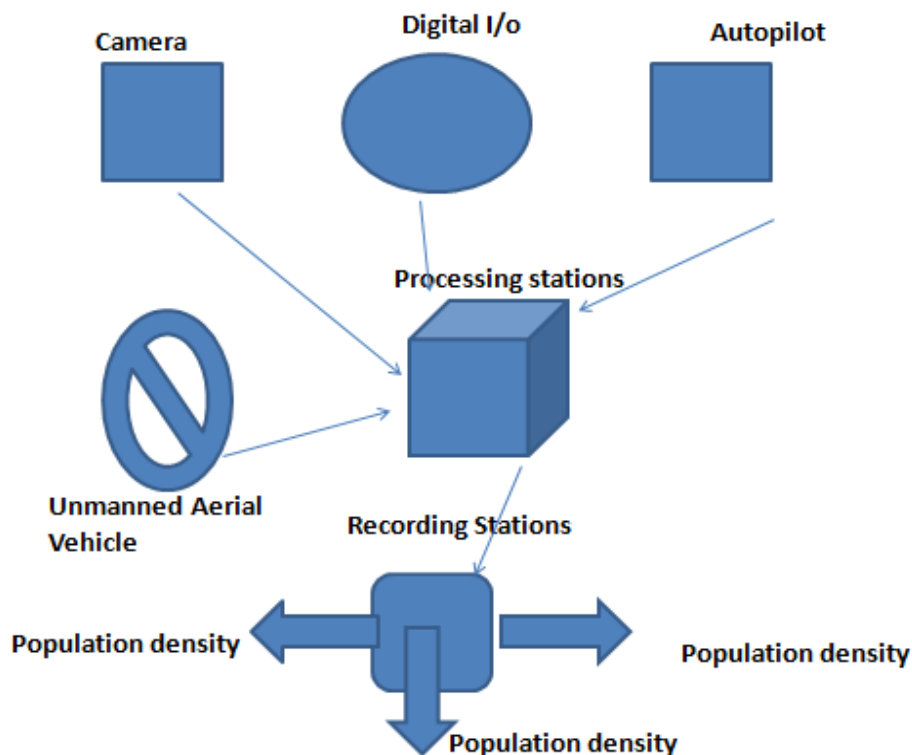


Figure2. The Schematic diagram of recording

Steps of Algorithm development-

Wavelet based approach

This system involves the development of tools for environment image enhancement and analysis. The development of device by using wavelet analysis and 3D image processing will be done in Matlab and Labview. The technique can reduce noise contents in signals and images enhancing the gradient at most edges. The noise filtration technique by Symlet Wavelet will be quite robust. There will be many possible extensions of the technique. Its applications in spatially dependent noise filtration, edge detection and enhancement, image restoration, and motion noise removal.

This system involves the development of tools for environment image enhancement and analysis. The development of device by using wavelet analysis and 3D image processing will be done in Matlab and Labview. The technique can reduce noise contents in signals and images enhancing the gradient at most edges. The noise filtration technique by Symlet Wavelet will be quite robust. There will be many possible extensions of the technique. Its applications in spatially dependent noise filtration, edge detection and enhancement, image restoration, and motion noise removal. The main aim is to implement de-noising algorithms based upon the discrete wavelet transform (DWT) that can be applied successfully to enhance noisy multidimensional data sets in the imaging technology. The work will present both image decomposition, thresholding and reconstruction and the 3-D de-noising of image volumes using the DWT as a new approach which can be used in the processing of images.

Daubechies proposes modifications of her wavelet such that their symmetry can be increased while retaining simplicity. The idea consists of reusing the function m_0 introduced in the dbN considering the $|m_0(\omega)|^2$ as function ω of $z = e^{i\omega}$. Then we can factor ω in several different ways in the form of $\omega(z) = U(z) \overline{U\left(\frac{1}{z}\right)}$. The roots of ω with modulus not equal to 1 go in pairs. If one is, z_1 , $\frac{1}{z_1}$ is also a root. By selecting U such that the modulus of all its root is strictly less than 1, we build Daubechies wavelets dbN. The U filter is minimum phase filter. By making another choice, we obtain more symmetrical filters; these are Symlets. Symlets are compactly supported wavelets with least asymmetry and highest number of vanishing moments for a given support width. Associated scaling filters are near linear-phase filters having support width $2N-1$ and filters length $2N$.

Daubechies introduced scaling function $\phi(x) = \frac{1}{\sqrt{2}} \sum_n h_n \phi(2x - n)$ for wavelet dbN (h_n are the coefficients associated to a ‘standard’ multiresolution analysis and the corresponding orthonormal basis). However, more symmetric wavelet filters make easier to deal with the boundaries of the image Symmetric filters are linear phase filters. More precisely, a filter with filter coefficients a_n is called linear phase if the phase of the function $a(\xi) = \sum_n a_n e^{-in\xi}$ is a linear function of ξ , i.e., if for some $l \in \mathbb{Z}$, $a(\xi) = e^{-il\xi} |a(\xi)|$. This means that a_n are symmetric around l , $a_n = a_{2l-n}$.

The phase introduced by I. Daubechies for Symlet wavelet is given below

$$\widehat{\Phi}^1(\xi) = m_0(\xi/2) \overline{m_0(\xi/4)} m_0(\xi/8) \overline{m_0(\xi/16)} \dots$$

$$= \prod_{j=1}^{\infty} [m_0(2^{-2j-1}\xi) \overline{m_0(2^{-2j-2}\xi)}],$$

where $m_0(\xi) = \frac{1}{\sqrt{2}} \sum_n h_n e^{-in\xi}$. The phase $\widehat{\Phi}^1$ of the Symlet wavelet is closer to linear phase than that of dbN, $\widehat{\Phi}(\xi) = \prod_{j=1}^{\infty} m_0(2^{-j}\xi)$.

Detailed description

For the purpose of promoting an understanding of the principles of the invention, reference will now be made to the embodiment illustrated in the figures and specific language will be used to describe them. It will nevertheless be understood that no limitation of the scope of the invention is thereby intended. Such alterations and further modifications in the illustrated system, and such further applications of the principles of the invention as would normally occur to those skilled in the art are to be construed as being within the scope of the present invention.

It will be understood by those skilled in the art that the foregoing general description and the following detailed description are exemplary and explanatory of the invention and are not intended to be restrictive thereof.

Flow chart of Algorithm

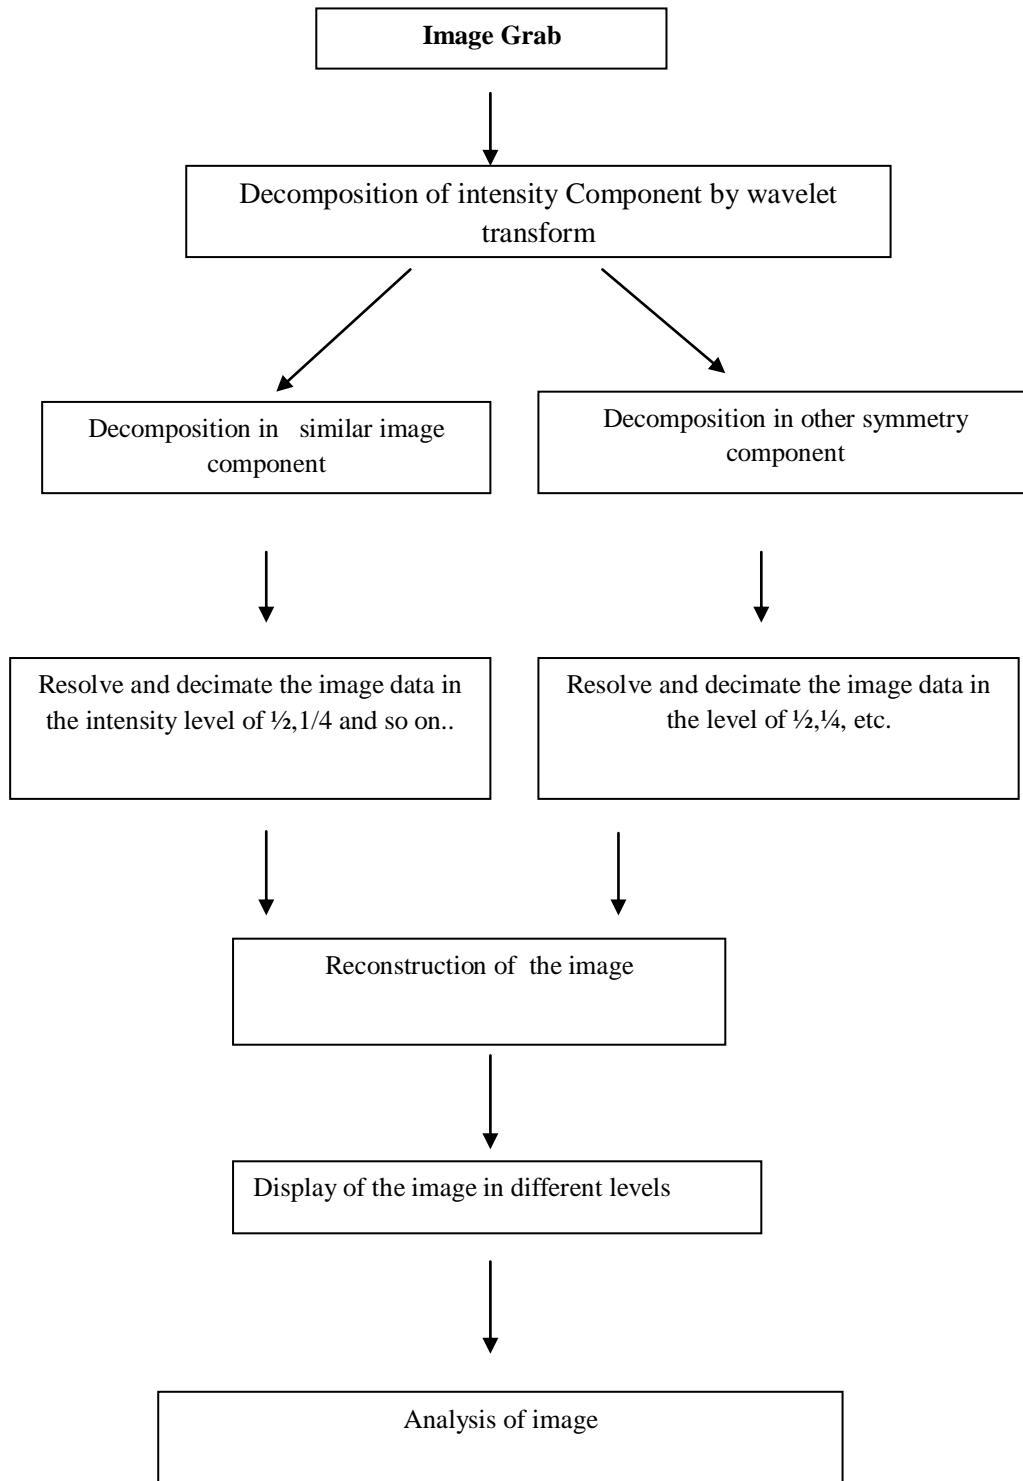


Figure 3- Flow diagram of the analysis by Symlet Wavelet

Steps of Hue threshold Algorithm development-

The Image Processing steps-

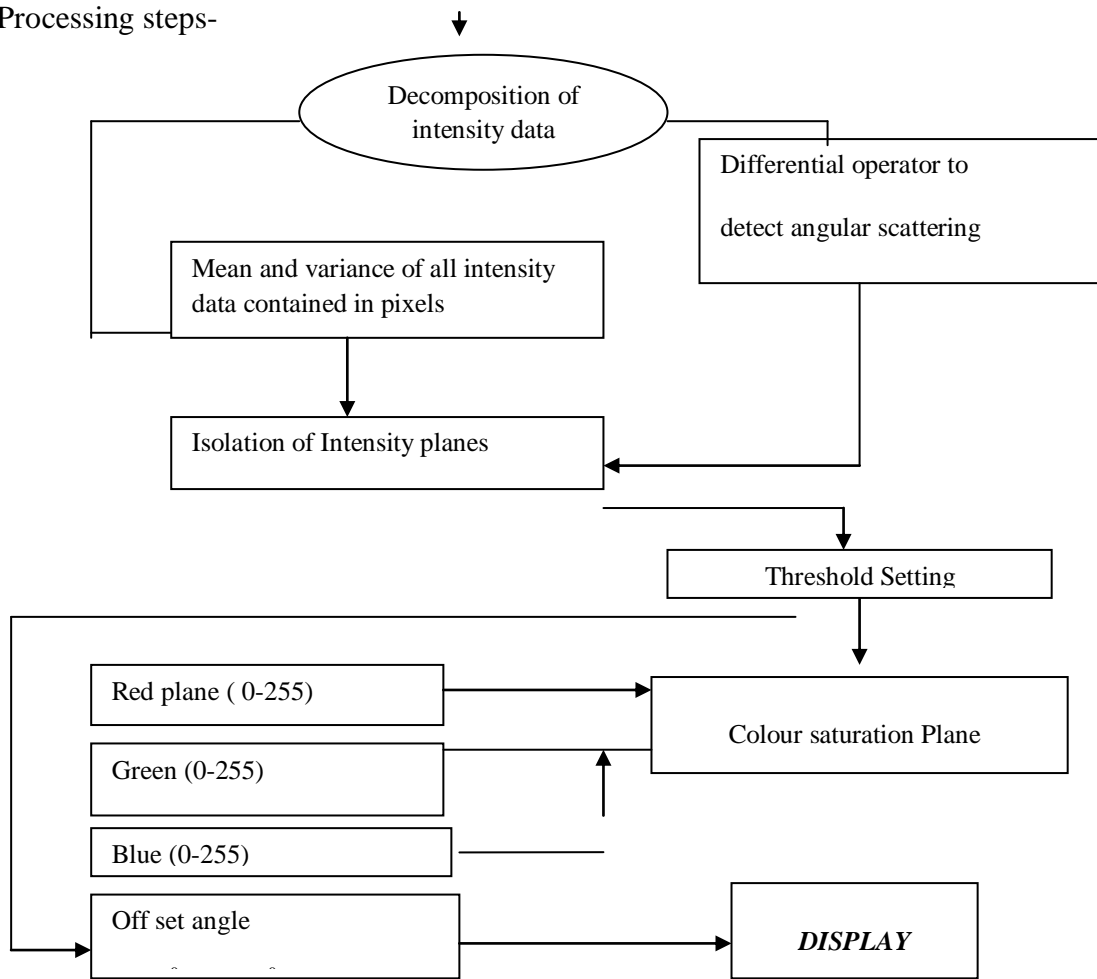


Figure 4- Flow diagram for abnormalities detection in image using Hue Separation

The terms "comprises", "comprising", or any other variations thereof, are intended to cover a non-exclusive inclusion, such that a process or method that comprises a list of steps does not include only those steps but may include other steps not expressly listed or inherent to such a process or method. Similarly, one or more sub-systems or elements or structures or components preceded by "comprises... a" does not, without more constraints, preclude the existence of other, sub-systems, elements, structures, components, additional sub-systems, additional elements, additional structures or additional components. Appearances of the phrase "in an embodiment", "in another embodiment" and similar language throughout this specification may, but not necessarily do, all refer to the same embodiment.

Unless otherwise defined, all technical and scientific terms used herein have the same meaning as commonly understood by those skilled in the art to which this invention belongs. The

system, methods, and examples provided herein are only illustrative and not intended to be limiting Embodiments of the present invention will be described below in detail with reference to the accompanying figures.

FIG. 1 discloses a system for population census based on vision and remote sensing. The system includes an input for receiving images of the population. The system further includes a memory for storing data. The system also includes a processor adapted to process the received information for face recognition and filtering of the noise to generate census data. The processor is further adapted to analyze the census data to generate census related information. The system also includes a display 108 to present census related information to a user.

FIG. 2 discloses a method for population census based on vision and remote sensing. It shows image recording system for population census based on vision and remote sensing. The system includes image sensor for capturing images or video. The system further includes unmanned aerial vehicle having capability of imaging sensors etc. The system also includes autopilot. The system also includes input output means for providing and input. The input can be provided by means of keyboard, mouse, light pens etc. The input can also be directly provided by external sources. The system further includes processing stations for processing the captured images. The system also includes recording station for recoding population samples or population density.

The method includes step of receiving images of the population. The method further includes step of processing the received images for face recognition and step filtering of the noise to generate census data. The method also include step of analyzing the census data to generate census related information.

The received images are captured by any image capturing sensor or can be inputted from an external source. The image capturing sensor can be a camera or an internet protocol camera. The received images are processed based on Hue threshold for face recognition and Symlet wavelet for noise filtration. The face recognition processing is based on Hue threshold technique. The Hue threshold technique is applied on the received images. The Hue threshold technique is based on intensity isolation Scattered light from the cotton tuft is collected by CCD camera lens and converted image in two-dimensional arrays. The received image is send to Hue saturation plane where it is displayed in Red (R), Green (G) and Blue (B) colors. The RGB plane is 1200 each with respect to white light. Three hues are made as a result of RG, GB, and BR planes. For Hue saturation value we have numbers (0-255) from which we can adjust the plane value to separate the hue plane for contaminants in the pure cotton. We have sum and division function before hue plane display. The

sum function adds the intensities, which come from different surfaces of the region. The resultant component is differentiated from the intensity level of image. The hue mask is set in -1800 to $+1800$ whose domain and range is covering the total lux reflected from different surface of the area. This is useful for setting surface gradient between the light scattered from the person and other object. This is made to work in real time at the calculation time of approximately 10-4s. The received images are also enhanced to reduce noise content and enhancing the gradient at most edges in signals by using wavelet analysis and 3 dimensional images processing in MATLAB and LABVIEW. The noise filtration technique by Symlet Wavelet will be quite robust. There will be many possible extensions of the Symlet and Hue saturation techniques.

The main aim is to implement de-noising algorithms based upon the discrete wavelet transform (DWT) that can be applied successfully to enhance noisy multidimensional data sets in the imaging technology. The present invention provides image decomposition, thresholding and reconstruction and the 3-D de-noising of image volumes using the DWT as a new approach which can be used in the processing of images.

FIG. 3 and 4 show a flow diagram for abnormalities detection in image using Hue Separation in system and method of population census based on vision and remote sensing method. In one embodiment, the captured image is decomposed into intensity data. The angular setting is detected based on differential operator. The mean and variance of all intensity data is contained in the pixels. The isolation of intensity planes is compared to the threshold setting. The colour saturation plane is identified according to the red, blue and green planes and offset angle.

FIG. 5 shows an original image for population demography based on vision and remote sensing method. The image is analyzed for population demography.

FIG. 6 and 7 show an analyzed image distribution used in population census based on vision and remote sensing method.

RESULT



Figure5 Population Census image

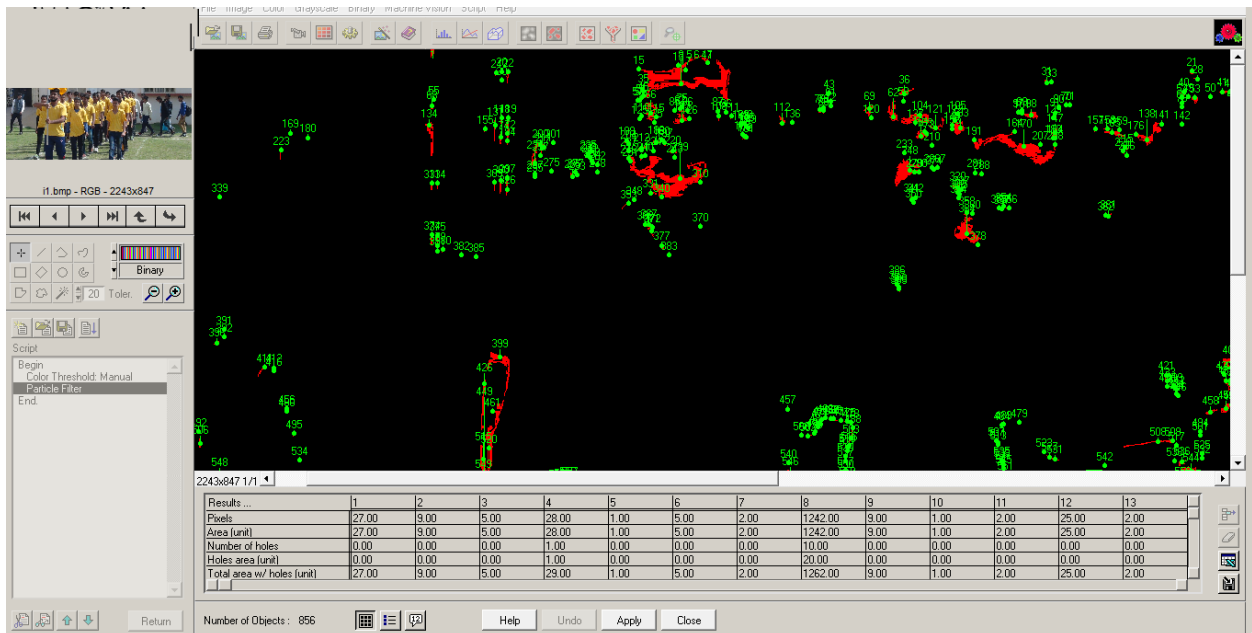


Figure 6 Analyzed image for population demography

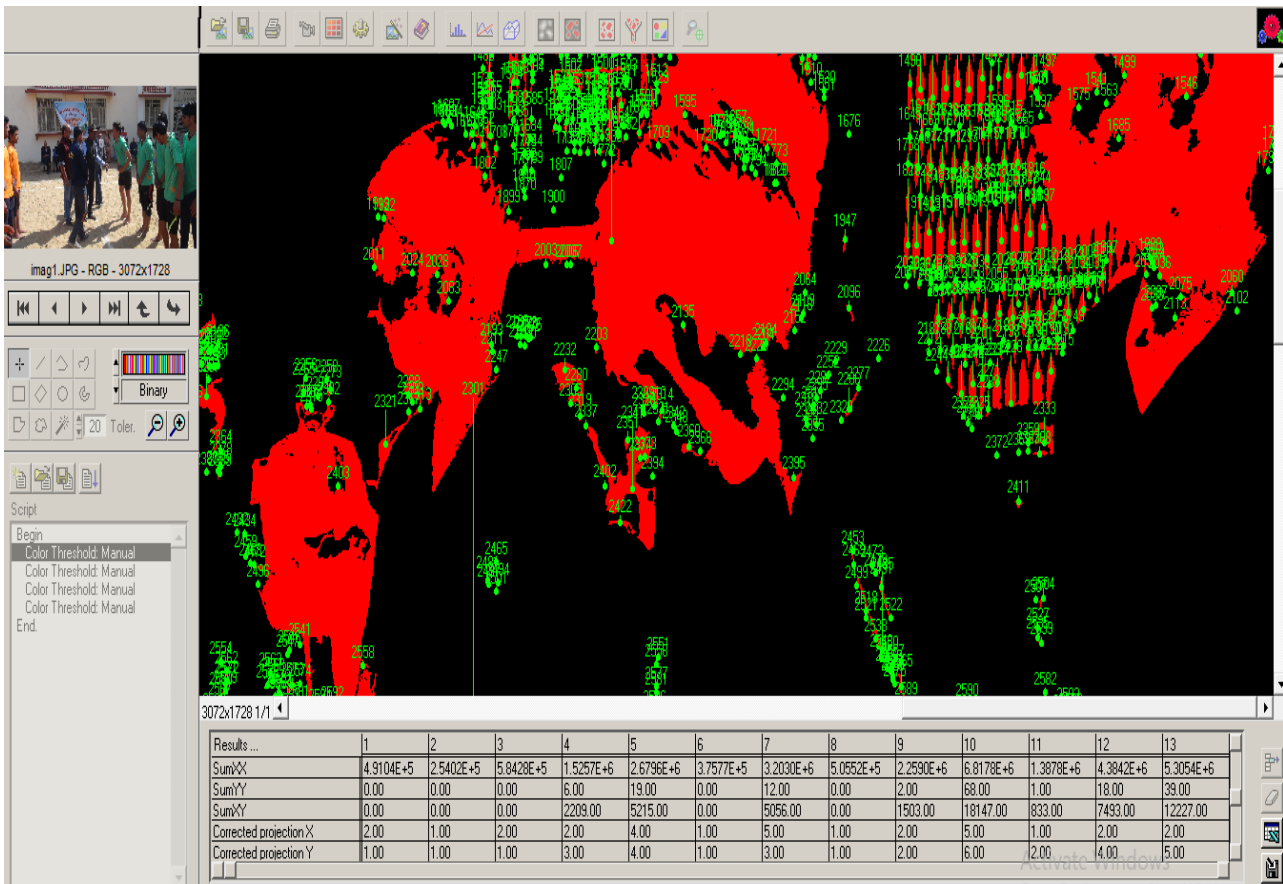


Figure7. The recorded and analyzed image

CONCLUSION

The system developed gives on line public distribution of specific local areas. It stores the records of population area wise in a city and state. Anyone can retrieve the visual data of the existence of people in specific areas or village or city.

The major advantage of the research is it is user friend, low cost and low space consuming. A less time consuming and detection capacity algorithm for image texture is developed using wavelet transform. A spatial database of image data from a variety of remote sensing sources, and derived and interpreted information in simplest image format, including population density information. It produces report which documents the short time population increase and decrease records. It gives a companion guidebook which can be used by different authorities for socio economic development. A visual database can be published time to time in very short interval on web page.

REFERENCES

1. Lo, C. P.. Automated population and dwelling unit estimation from high-resolution satellite images. a GIS approach. *International Journal of Remote Sensing*(1995; 16(1): 17 - 34.
2. Lu, D. S., Q. H. Weng and G. Y. Li. Residential population estimation using a remote sensing derived impervious surface approach. *International Journal of Remote Sensing*. 2006;27(16): 35533570
3. Mesev, V. *Integration of GIS and remote sensing*. Chichester. 2007;Wiley & Sons.
4. Lo, C. P. Testing urban theories using remote sensing. *GIScience and Remote Sens*.2004; 41: 95115.
5. Lo, C. P. Application of Landsat TM Data for Quality of Life Assesment in an Urban Environment .*Computers, Environment and Urban Systems*. 1997; 21(3/4): 259-276.
6. Lo, C. P. Urban Indicators of China from Radiance-Calibrated Digital DMSP-OLS Nighttime Images. *Annals of the Association of American Geographers*. 2002; 200292(2): 225 - 240.
7. Lo, C. P. Testing urban theories using remote sensing. *GIScience and Remote Sensing* 2004;41: 95115.
8. Lo, C. P. and R. Welch. Chinese Urban Popuilation Estimates. *Annals of the Association of American Geographers*.1977 67,(2): 2;46-253.
9. Sutton, P. Modeling population density with night-time satellite imagery and GIS. *Computers, Environment and Urban Systems*. 1998;21(3-4): 227-244.
10. Chen.K. An approach to linking remotely sensed data and areal census data." *International Journal of Remote Sensing*. 2002; 23(1): 37 – 48.
11. Bin Zou, Jingwen Chen, Liang Zhai, Xin Fang and Zhong Zheng. Satellite Based Mapping of Ground PM_{2.5} Concentration Using Generalized Additive Modeling” *Remote Sens*. 2017; 9(1): 1
12. Daniele Marinelli, Claudia Paris, Lorenzo Bruzzonei .A Novel Approach to 3-D Change Detection in Multitemporal LiDAR Data Acquired in Forest Areas, *IEEE Transactions on Geoscience and Remote Sensing*2018; Volume: 56, Issue: 6
13. Yang Long, Yiping Gong, Zhifeng Xiao, Qing Liu. Accurate Object Localization in Remote Sensing Images Based on Convolutional Neural Networks. *IEEE Transactions on Geoscience and Remote Sensing*,2017; Volume: 55, Issue: 5Page(s): 2486 - 2498 .
14. Emmanuel Maggiori. Convolutional Neural Networks for Large-Scale Remote-Sensing Image Classification. *EEE Transactions on Geoscience and Remote Sensing*. 2017 ; Volume: 55, Issue: 2, Page(s): 645 – 657.

15. Fabio Pacifici. The Importance of Physical Quantities for the Analysis of Multitemporal and Multiangular Optical Very High Spatial Resolution Images. IEEE Transactions on Geoscience and Remote Sensing. 2014.;olume: 52, Issue: 10, Page(s): 6241 – 6256.
-