

## *International Journal of Scientific Research and Reviews*

### **Experimental and Numerical Evaluation of Modified Micro – DVAWT Manufactured by Using Fusion Decomposition Modelling**

**P. Ramana Babu<sup>1\*</sup>, P. Jaikishan<sup>2</sup> and Yadav E. Raghavendra<sup>3</sup>**

<sup>1,2,3\*</sup>Department of Mechanical Engineering,  
Aditya College of Engineering and Technology, Surampalem, Andhra Pradesh, India.  
Email: [ramana33510@gmail.com](mailto:ramana33510@gmail.com)

#### **ABSTRACT**

Due to the depreciation of fossil fuels and rising global warming the prices of derivated products from fossils are increasing which resulted in instabilities in the energy market. As a result, there is an increased research taking place in the area of renewable energies especially in the field of wind energy which is abundantly available on Earth. The horizontal axis wind turbines which are also known as lift based wind turbines are used extensively for the electricity generation from wind. This HAWT are not preferable where land availability is low and wind speed is high. Small scaled vertical axis wind turbines (VAWT) shows the best potential for power generation at low wind speeds at various topological conditions. In this work, a novel configuration of micro- DVAWT prototype is developed by using NREL profile for energy conversions on small scale at low wind speed. The wind tunnel investigations have been made on the micro – DVAWT scaled model which is manufactured using Additive Manufacturing (AM) technique such as Fused Decomposition Modelling (FDM). The design of micro- DVAWT is carried out in Solidwork. The FDM of scaled DVAWT is done by using polylactic acid (PLA) as filler material on a 3D printer. The experimentation is carried out in a wind tunnel and the performance of the prototype is analyzed using numerical methods.

**KEYWORDS:** AM, FDM, 3D printer, NREL, DVAWT, Renewable energy, PLA

#### **\*Corresponding author**

**P. Ramana Babu**

Asst. Professors

Department of Mechanical Engineering,

Aditya College of Engineering and Technology, Surampalem, Andhra Pradesh, India.

Email: [ramana33510@gmail.com](mailto:ramana33510@gmail.com)

## **I. INTRODUCTION**

In recent decades, globally many policies are being made by many countries to decrease the usage of exhaustible energy resources like fossil fuels which resulted in an increase in demand for non – exhaustible energy technologies. As a result, the researchers are showing a great interest in these technologies and are being encouraged to research further by investing billions of dollars for research on renewable energy technologies by many countries and organizations. Even though horizontal axis wind turbines (HAWT) keep on being the most prominent for huge scale power production, their partners, vertical axis wind turbines (VAWT), particularly Darrieus turbines, have gotten much consideration in recent decades for independent applications.

The simplicity of maintenance, blade manufacture simplicity, and lower working noises are only a portion of the benefits of VAWTs over regular propeller-type turbines. Furthermore, their operation is free of wind direction and they show higher efficiency in turbulent flow fields, making them fascinating. In spite of the expressed points of VAWT advantages, a few scientists have asserted that Darrieus-type turbines with fixed rotor geometry and straight blades parallel to the axis of rotation are not fit for self- starting.

Various rotor geometries have proposed by researchers to resolve the self-starting issue. Also various types of passive pitching and active pitching blade mechanisms, usage of various airfoils in the design of blades, usage of various metals and non - metals in their manufacturing, etc., also been covered by researchers in their work. Because of these issues, examinations concerning the performance of VAWTs can be disputable. Major difficulties are additionally unavoidable in studies related to their starting behavior.

In this work, a novel configuration of micro- DVAWT prototype is developed by using NREL profile for energy conversions on small scale at low wind speed. The wind tunnel investigations have been made on the micro – DVAWT scaled model which is manufactured using Additive Manufacturing (AM) technique such as Fused Decomposition Modelling (FDM). The design of micro- DVAWT is carried out in Solidworks. The FDM of scaled DVAWT is done by using poly-lactic acid (PLA) as filler material on a 3D printer. The experimentation is carried out in a wind tunnel and the performance of the prototype is analyzed using numerical methods. The obtained results are scaled to the four different scales by using Froude scaling laws and the Annual Energy Output (AEO) is calculated and stated.

## II. PERFORMANCE EQUATIONS

The performance parameters and equations are used for the evaluation of the performance of the wind turbine. The performance equations used are the Tip Speed Ratio (TSR), the coefficient of performance ( $c_p$ ), and annual energy output (AEO), The equations are as follows:

$$TSR = \frac{\omega R}{V} \dots\dots\dots (1)$$

$$c_p = \frac{P}{0.5\rho AV^3} \dots\dots\dots (2)$$

$$P = c_p 0.5\rho AV^3$$

$$AEO = 0.01328 D^2 V^3 \dots\dots\dots (3)$$

Where

$$\omega = \frac{2\pi N}{60},$$

N = rotations per minute

R = Rotor radius of wind turbine

D = Rotor diameter of wind turbine

V = mean wind speed

A = rotor swept the area

P = Rotor power

$\rho$  = Density of air

A = D X H

H = Blade Span


The value of  $c_p$  is taken as 0.59 in this work since from Betz limit the maximum  $c_p = 0.59$  and for many wind turbine  $c_p$  is typically 0.36.

## III. GEOMETRIC MODELLING AND FDM OF TURBINE


### A. Geometric Modelling:

The modeling of the micro – DVAWT is done by using Solidworks Part Design. NREL 817 airfoil is taken in the design of the micro- DVAWT. Figure 3 shows the isometric view of the micro


– DVAWT modeled in Solidworks and figure 2 shows the dimensions of the blade alignment and figure 1 shows the dimensions of the modeled micro - DVAWT.

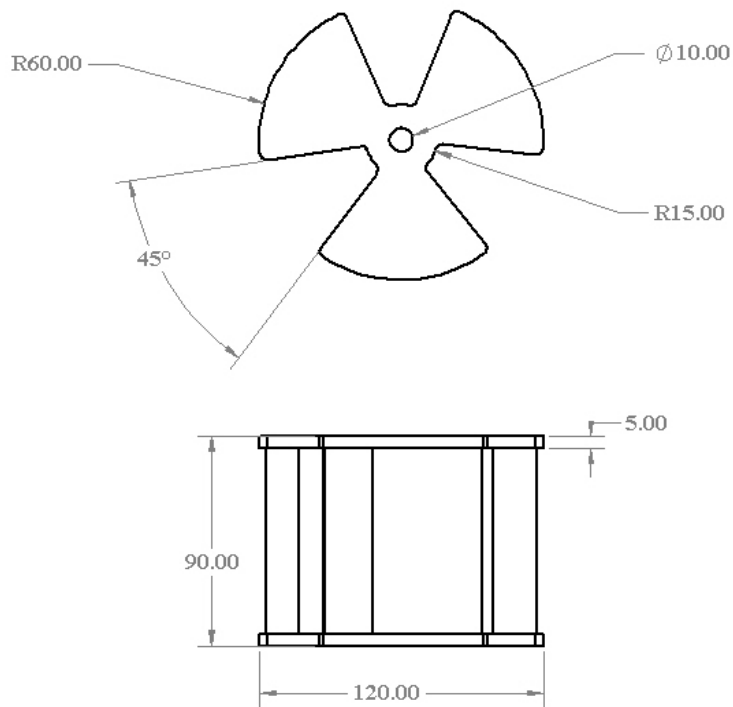

**Fig. 1: Micro-Darrieus vertical axis wind turbine dimensions**

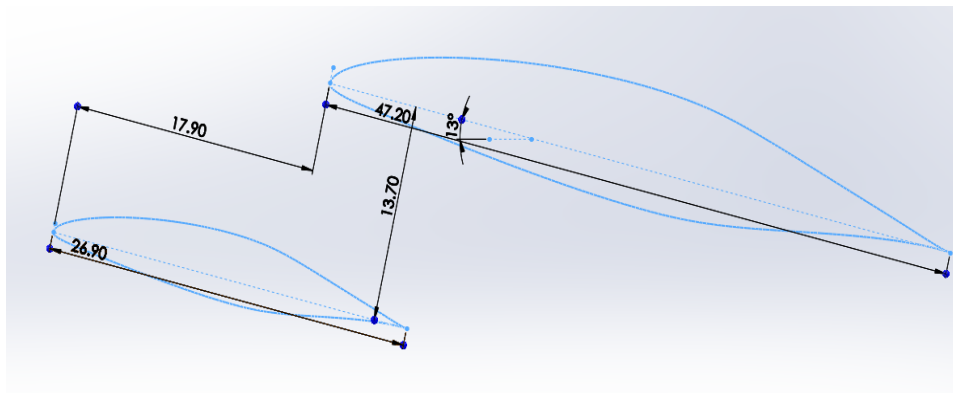


**Fig. 2: Micro-Darrieus vertical axis wind turbine blades alignment**

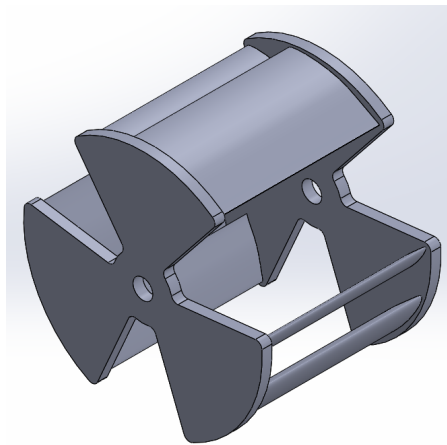

**Fig. 3: Micro-Darrius vertical axis wind turbine isometric view**

The modeled turbine is 3D printed using fused decomposition modeling (FDM) technique. Figure 4 shows the 3D printed scaled micro - DVAWT.

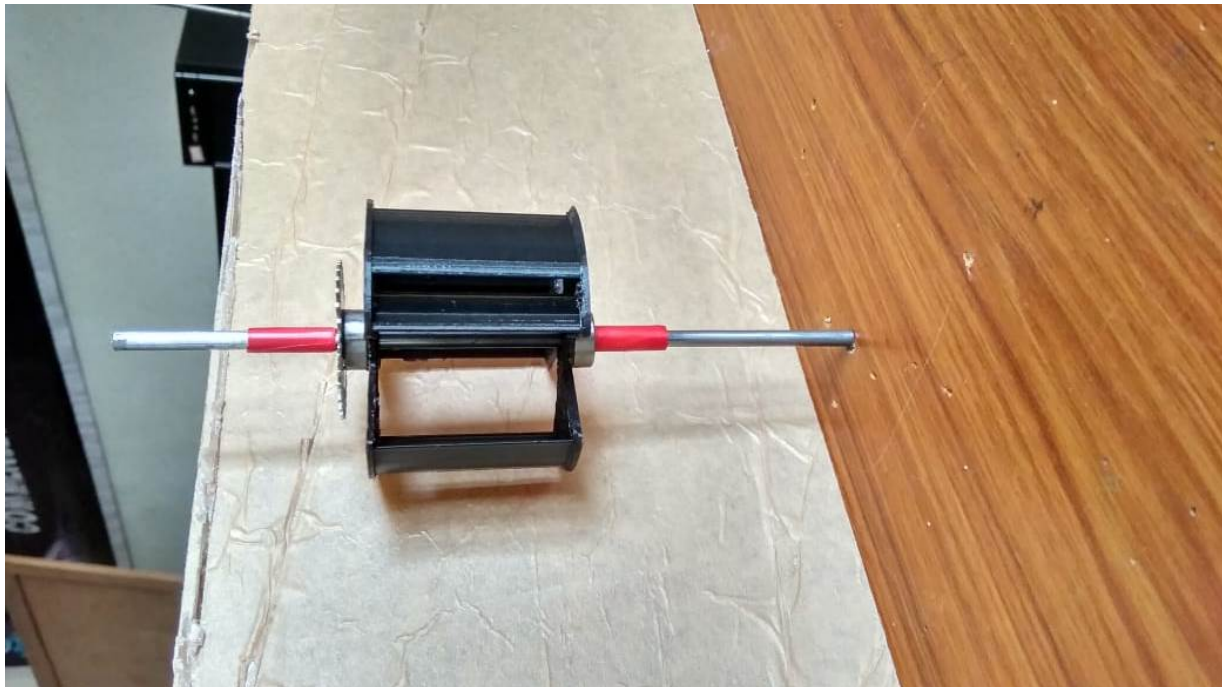

**Fig. 4: Micro-Darrius vertical axis wind turbine Scaled model**

The wind tunnel setup is created to take wind velocities from scaled micro – DVAWT. Fig.5 showing the wind tunnel setup.



Fig. 5: Testing of Micro-Darrius vertical axis wind turbin

#### IV. EXPERIMENTATION AND NUMERICAL EVALUATION

##### A. Experimentation of Scaled Model:

The scaled micro – DVAWT model is analyzed in an open circuit wind tunnel. Rotary encoders are arranged to the rotor shaft to measure the rotational speed of the turbine. Inlet wind velocity in the wind turbine is taken as a boundary parameter to measure the rotation of the wind turbine. The wind velocity is measured by using wane type anemometer. The rotational speed of the wind turbine is noted for five different wind velocities. The readings taken are represented in Table 1.

Table 1

Wind Velocity(m/s)	RPM
1.4	148
3.5	333.4
4.9	650
6	1452
6.5	1621
7.5	2461

The model is tested at ambient conditions of 28° C, 1 atmospheric pressure and relative humidity of 55%. The winding temperature from blower varied from 29.9° C to 31.2° C during experimentation.

**B. Numerical Analysis of micro –**

*DVAWT scaled model:* The numerical analysis is done on the scaled micro – DVAWT to the values for the performance parameters by using the equations from (1) to (3). In the calculation the  $c_p$  value is taken as 0.59 which is maximum theoretical value from Betz law. The results obtained are tabulated in Table 2 and Table 3.


**Table 2**

Wind Velocity(m/s)	RPM
1.4	148
3.5	333.4
4.9	650
6	1452
6.5	1621
7.5	2461


**Table 3**

TSR	Power(W)
0.65	0.0027
0.59	0.0428
0.82	0.117
1.51	0.215
1.55	0.273
1.807	0.421

Plots are plotted by taking wind velocity on X-axis and rpm on Y-axis and Power on Y-axis and TSR on X-axis. The plots are shown in Graph 1 and Graph 2. Graph 1 shows the variation of rpm with respect to wind velocity and graph 2 shows the variation of Powerwith respect to TSR.

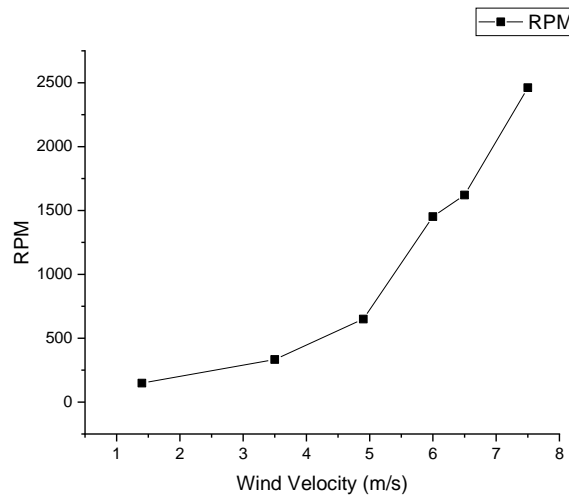

**Graph 1: RPM vs Wind Velocity**

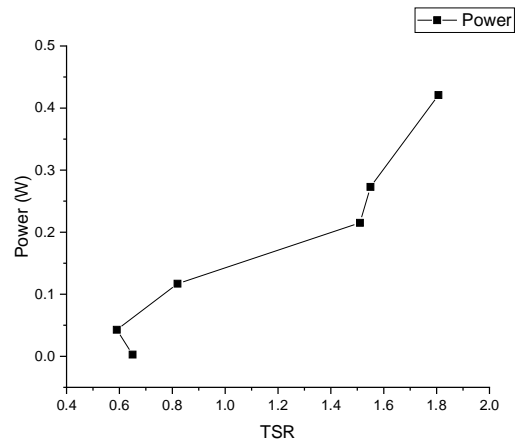

Graph 2: Power vs TSR

## V. SIMILITUDE ANALYSIS

### A. Similitude Analysis:

This similitude analysis is done by using Froude scaling laws for different scaling factors considering the results of the current study. The scaling factor taken are shown in Table 4 based on the nomenclature of turbines.

$$\text{Scaling factor} = \lambda$$

Table 4

Nomenclature	Scaling Factor ( $\lambda$ )
Micro-scale wind turbine ( $\mu$ SWT)	1
Small-scale wind turbine (SSWT)	10
Mid-scale wind turbine (MSWT)	50
Large-scale wind turbine (LSWT)	100

$\lambda = 1$  represents the model studied in this work. Table 5 represents the Froude power scaling factors and Table 6 represents the rated power the prototype.

$$\text{Froude Scaling factor for Rated Power} = \lambda^{3.5}$$

The rated power is calculated at TSR = 0.65 where P = 0.0027 W and TSR = 1.807 where P = 0.421 W.



Table 5

Scaling Factor ( $\lambda$ )	Froude Power Scaling( $\lambda^{3.5}$ )
1	1
10	3,162.27
50	883,883.47
100	$10^7$

Table 6

Scaling Factor ( $\lambda$ )	Prototype Power(at TSR = 0.65, P = 0.0027 W)	Prototype Power(at TSR = 1.807, P = 0.421 W)
1	0.0027 W	0.421 W
10	8.538 W	1,331.31 W
50	2,386.48 W	372,114.94 W
100	27,000 W	4,210,000 W

**B. AEO analysis for different blade span:**

The Annual Energy Output Analysis (AEO) is carried out using Froude scaling laws for different scaling factors considering the results of the current study. Table 7 represents the Froude scaling rotor factors for AEO analysis and Table 8 represents the Froude scaling wind velocity factors for the prototype.

$$\text{Froude Scaling factor for rotor diameter} = \lambda$$

$$\text{Froude Scaling factor for wind velocity} = \lambda^{0.5}$$

Table 7

Rotor Diameter (m)	Scaling Factor ( $\lambda$ )	Froude Rotor Scaling ( $\lambda$ )
0.06	1	0.06
0.06	10	0.6
0.06	50	3
0.06	100	6

Table 8

Wind Velocity (m/s)	Scaling Factor ( $\lambda$ )	Froude Wind Velocity Scaling( $\lambda^{0.5}$ )
1.4	1	1.18
3.5	10	5.91
4.9	50	15.6
6	100	24.49

Table 9 represents the Annual Energy Output Analysis (AEO) in kWh/year for the respective rotor scales and are calculated for velocity scales having the values 1.18 m/s and 5.91 m/s since these are the common local wind velocities around the Globe.

Table 9

Froude Rotor Scaling ( $\lambda$ )	AEO (kWh/year) (at V = 1.18 m/s)	AEO (kWh/year) (at V = 5.91 m/s)
0.06	0.00007848	0.00986
0.6	0.007846	0.9868
3	0.1962	24.67
6	0.7848	98.68

### Results Interpretation:

The micro- DVAWT wind turbine modeled using Solidworks and printed using FDM techniques shows a quite performance under very less wind velocity of 1.4 m/s for the scaled model and 1.18 m/s for the prototype. The study is considered to be successful since the turbine scaled model started rotation at 1.4 m/s wind velocity only. Further, the experimented model sustained wind velocity of 7.5 m/s which shows that it can function in areas with harsh wind conditions.

## VI. CONCLUSION

The micro- DVAWT wind turbine modeled using Solidworks isscaled and 3D printed on MakerBot Replicator using PLA filling material. The printed scaled model is tested in a wind tunnel at wind velocities 1.4 m/s to 7.5 m/s and at ambient conditions of 28° C temperature, 1-atmosphere pressure and 55% relative humidity. The following are observations made from the experimental studies:

1. The minimum wind velocity at which the scaled model starts rotation is 1.4 m/s. At this velocity, the turbine accelerated from 0 to 148 rotations per minute.
2. The maximum wind velocity up to which the turbine showed a study increase in rotations per minute is 7.5 m/s. At this velocity, the turbine accelerated up to 2461 rotations per minute.
3. After increasing the wind velocity above 7.5 m/s the rotations per minute of the rotor going on increasing without increasing the wind velocity.
4. From points 1 to 3 we can say that the cut – in speed for the prototype is 1.4 m/s and cut – out speed is 7.5 m/s.
5. Now coming to the numerical calculations the conclusions derived are as follows:
6. The optimal power is 27 kW at cut-in speed and 4.21 MW at the cut – out speed for a prototype having a rotor of 6m diameter.
7. Also, the AEO for 6m diameter prototype at 1.18 m/s wind velocity is 0.7848kWh/year which is minimum and 98.68 kWh/year which is maximum.

The objective of the research to reduce the static torque and model a wind turbine which operates at low wind velocity is successful.

## **FUTURE SCOPE:**

The assumption taken in the study is that the wind turbine coefficient of performance is 0.59 which should be calculated manually by load cells is left a task to be performed by the authors for future generations. If the prototype is to be made using this research the material sustainability for the considered prototype should be evaluated by using FEA simulation studies or experimentation which is also left a task to be performed by the authors for future generations.

## **REFERENCES**

1. Y. Y. Dennis Y C Leung, "Wind energy development and its environmental impact: A review," *Renew. Sustain. Energy Rev.*, , Jan. 2012; 16(1) : 1031–10392
2. Gasch R, Twele J. *Wind power plants – fundamentals, design, construction and operation*: Springer, 2012.
3. Daniel Halladay[1854].<http://www.ironmanwindmill.com/windmill-history.htm>.
4. Qasim, A.Y., R. Usubamatov, and Z.M. Zain. "Investigation and Design Impeller Type Vertical Axis Wind Turbine." *Australian Journal of Basic and Applied Sciences* 2011; 5(12): 121-126.
5. Marc Perez & Richard Perez. Update 2015 □□ A Fundamental Look at Supply Side Energy Reserves for The Planet: IEA-SHCP-Newsletter Nov. 2015; 62.
6. World wind energy.<http://www.wwindea.org/technology/ch01/estructura-en.htm>
7. Price, Trevor J. *Oxford Dictionary of National Biography*. Oxford University Press, 2009.
8. Shepherd, D. G. "Historical Development of the windmill." National Aeronautics and Space Administration office of management, 1990.
9. Wulff, H.E. *The traditional crafts of Persia, their development, technology and influence on eastern and western civilization*. MIT Press, 1966.
10. Savonius, S. J. "The S rotor and its application." *Mechanical Engineering*, no. 1931; 53 : 333-338.
11. Gupta, R., R. Das, R. Gautam, and S.S. Deka. "CFD Analysis of a Two bucket Savonius Rotor for Various Overlap Conditions." *ISESCO Journal of Science and Technology* 8-13;2012, May 2012 ;67-74.
12. Morshed, Khandakar N. *Experimental and numerical investigations on aerodynamic characteristics of savonius wind turbine with various overlap ratios*. Statesboro: Georgia Southern University, 2010.
13. Biswas, A., R. Gupta, and K.K. Sharma. "Experimental Investigation of Overlap and Blockage." *Wind Engineering* 2007 ;31-5 : 363–368.

14. Mid America windmill museum(1992).[http://www.midamericawindmillmuseum.org/imgs/home/windmill\\_2.jpg](http://www.midamericawindmillmuseum.org/imgs/home/windmill_2.jpg)
15. Manzoor, Hussain M, S Nawazish Mehdi, and P. Ram Reddy. "CFD Analysis of Low Speed Vertical Axis Wind." *International Journal of Applied Engineering Research* 2008; 3-1: 149–159.
16. Saha, U.K., and M. Jaya Rajkumar. "On the performance analysis of Savonius rotor with twisted blades." *Renewable Energy*, no. 2006; 31: 1776–1788.
17. Ghatage, Swapnil V., and Jyeshtharaj B. Joshi. "Optimisation of Vertical Axis Wind Turbine CFD Simulations and Experimental Measurements." *The Canadian Journal of Chemical Engineering* 2012; 90: 1186-1201.
18. Ghosh, P., M. A. Kamoji, S. B. Kedare, and S. V. Prabhu. "Model Testing of Single and Three-stage Modified Savonius Rotors and Viability Study of Modified Savonius Pump Rotor Systems." *International Journal of Green Energy*, no. 2009; 6: 22–41.
19. Hayashi, T., Y. Li, Y. Hara, and Y. Suzuki. "Wind Tunnel Test on a Three Stage out phase Savonius Rotor." *Proceeding of European Wind Energy Conference and Exhibition*. London, England, 2004.
20. Kumbernuss, J., J. Chen, H.X. Yang, and L. Lu. "Investigation into the relationship of the overlap ratio and shift angle of double stage three bladed vertical axis wind turbine (VAWT)." *Journal of Wind Engineering and Industrial Aerodynamics*, no. 2012; 107: 57-75.
21. Saha, U.K., S. Thotla, and D. Maity. "Optimum design configuration of Savonius rotor through wind tunnel experiments." *Journal of Wind Engineering and Industrial Aerodynamics*, no. 2008; 96: 1359– 1375.
22. Diaz, F., J. Gavalda, and J. Massons. "Drag and Lift coefficient of the savonius wind machine." *Journal of Wind Energy*, no. 1991; 15: 240-246.
23. Rahman, Mosfequr, KhandakarNiazMorshed, Jeffery Lewis, and Mark Fuller. "Experimental and numerical investigations on drag and torque characteristics of three-bladed savonius wind turbine." *proceedings of the ASME 2009 International Mechanical Engineering Congress & Exposition IMECE2009*. Lake Buena Vista, Florida, 2009; 85-94.
24. Carrigan, Travis J., Brian H. Dennis, Zhen X. Han, and Bo P. Wang. "Aerodynamic Shape Optimization of a Vertical-Axis Wind Turbine Using Differential Evolution. " *International Scholarly Research Network ISRN Renewable Energy*, 2012.

25. Howell, Robert, Ning Qin, Jonathan Edwards, and Naveed Durrani. "Wind tunnel and numerical study of a small vertical axis wind turbine." *Renewable Energy* 2010; 35: 412-422.
  26. Beri, H., and Y. Yao. "Effect of Camber Airfoil on Self Starting of Vertical Axis Wind Turbine." *Journal of Environmental Science and Technology* 2011; 4-3: 302-312.
  27. Hameed, M. Saqib, and S.KamranAfaq. "Design and analysis of a straight bladed vertical axis wind turbine blade using analytical and numerical techniques." *Ocean Engineering* 2012; 57: 248-255.
  28. Armstrong, Shawn, Andrzej Fiedler, and Stephen Tullis. "Flow separation on a high Reynolds number, high solidity vertical axis wind turbine with straight and canted blades and canted blades with fences." *Renewable Energy* 2012; 41: 13-22.
  29. Castelli, Marco Raciti, Andrea Dal Monte, Marino Quaresimin, and Ernesto Benini. "Numerical evaluation of aerodynamic and inertial contributions to Darrieus wind turbine blade deformation." *Renewable Energy* 2013; 51: 101-112.
  30. Carrigan, Travis J., Brian H. Dennis, Zhen X. Han, and Bo P. Wang. "Aerodynamic Shape Optimization of a Vertical-Axis Wind Turbine Using Differential Evolution." *International Scholarly Research Network ISRN Renewable Energy*, 2012.
  31. Wakui, Tetsuya, Yoshiaki Tanzawa, Takumi Hashizume, and Toshio Nagao. "Hybrid Configuration of Darrieus and Savonius Rotors for Stand-Alone Wind Turbine-Generator Systems." *Electrical Engineering in Japan* 2005; 150-4 : 259–266.
-